


## - SS7 Over IP Signalling -

The **IPTube•SS7•SIG•DI•T1** transports SS7 messages over IP networks. SS7 signaling network elements such as local and tandem switches, Mobile Switching Centers, Signal Transfer Points and Home Location Registers that are interconnected to remote network elements by **IPTube•SS7•SIG•DI•T1s** are able to transmit their signalling messages over cost effective and flexible IP networks.

The **IPTube•SS7•SIG•DI•T1** has two T1 interfaces with an integrated Drop and Insert Multiplexor. One T1 connects to the SS7 equipment's T1 link and the other connects to the T1 line. The T1 Drop and Insert provides for direct inline connection to the SS7 communication channel.

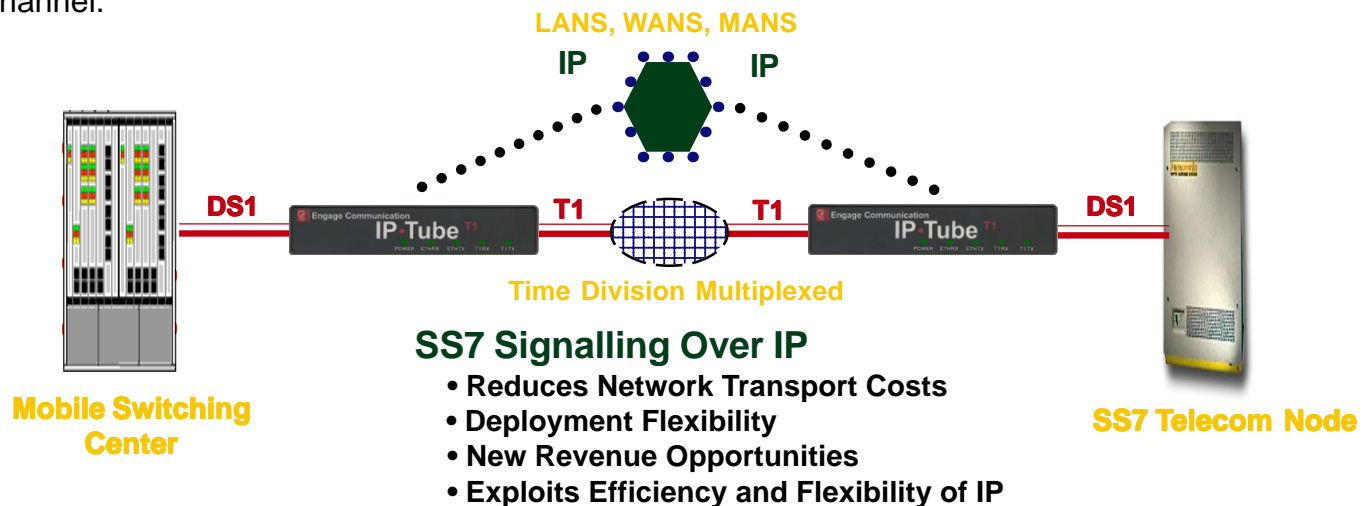

### Reduced Transport Costs

Carriers significantly reduce SS7 transport costs by replacing expensive long-haul dedicated signaling links with very competitively priced IP connectivity between network elements. Service providers cut costs with SS7 Over IP by offloading data traffic from SS7 networks onto IP networks.

### New Revenue Opportunities

The demand for data-centric services such as Short Message Service and Unified Messaging has created an opportunity for carriers to capitalize on new revenue generating opportunities. Cost-effective IP transport technology and service-rich SS7 applications enables carriers to quickly integrate enhanced services and capture new revenue.

### Legacy Investment Protection

Establishing an SS7 network with **IPTube•SS7•SIGs** does not require expensive forklift replacements or costly software upgrades for existing end nodes.


### Deployment Flexibility

Widely available commercial and private IP networks provides the SS7 network designer with competitive options for interconnecting the signaling points.

# IPTube•SS7•SIG•DI•T1

## Industry Standard SS7 Framer

The **IPTube•SS7•SIG•DI•T1** uses an industry standard SS7 Framer to receive and transmit SS7 messages. Minimal IP bandwidth is required to deliver SS7 since only the message data is encapsulated into IP packets.

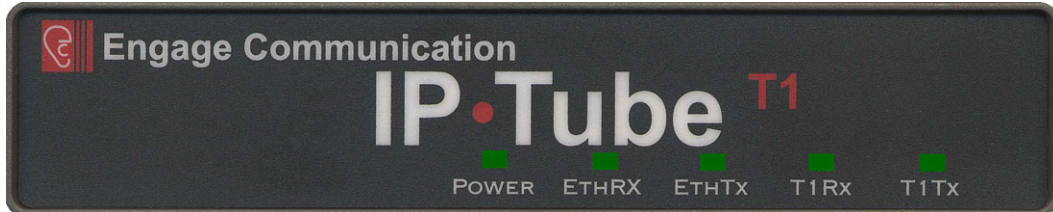

**Management** of the **IPTube•SS7•SIG•DI•T1** is accomplished with a Command Line Interface that is accessed through a Console or Telnet connection. Templates of the most common configuration provide for an Edit and Paste configuration. Built-in support for SNMP MIB 1 & 2.

## Technical Specifications

### LAN Network Interface:

- 10BaseT Ethernet

### LAN Network Protocols Supported:

- IP, TCP, UDP, ICMP, BOOTP

### SS7 Over IP Protocol:

- SS7 Frame UDP encapsuation

### T1/Fractional T1 Specifications:

- Framing - ESF or D4
- Coding - B8ZS or AMI
- Supports DS0 assignments from 1 to 24

### Regulatory:

- Safety - IEC60950
- EMC - CFR 47 Part 15 Sub Part B:2002
  - EN55022:1994+A1&A2
  - EN55024, ICES-003 1997
  - CISPR 22 Level A
- Telecom - Part68
- CE

### Quality of Service Support:

- IP Type of Service (TOS) CLI configurable
- IANA Registered UDP Port 3175

### TFTP Online Upgrade Capable (FLASH ROMs)

- IPTube is fully operational during upgrade

### Management:

- Telnet support with Edit and Paste Template Files
- Console Port for Out of Band Management
- SNMP support (MIB I, MIB II)
- Remote configuration, monitoring, & reset

### Power:

- 12-36 VDC 1.0A
- Optional -48V 0.25 Amp
- International Adapters Available

### Dimensions:

- 9" (L) x 7.3" (W) x 1.50"

## DC Back Panel

*Telco1: T1 Telecom Circuit  
Interface RJ48S*

*Telco2: T1 Connection to SS7  
Signalling Node*



*Console Port Connector  
• RJ 45 to DB 9 Male Adapter provided*

*Four Port 10BaseT Ethernet Hub*

*24 to 36 Volts DC Model  
-36 to -72 Volts DC Model*